## **INOXMARE®**

### **COUNTERSUNK CHIPBOARD SCREWS, FULL THREAD**



DATASHEET ITEM 6112

FASTENERS | MARINE HARDWARE | FITTINGS | SOLAR

### ITEM 6112 TECHNICAL SPECIFICATIONS

Pozi countersunk chipboard screws are mainly used in timber construction for non-structural connections. Fully threaded screws for fastening fittings and hinges.

To avoid problems during use, it is recommended to pre-drill appropriately.

Material	stainless steel		
Quality	A2		
Thread type	wood thread		
Surface	clean and bright		

#### YOUR ADVANTAGES



POZI-DRIVE = SCREWING IN SAFETY

- > Increased torque without cam-out
- Greater surface contact engagement between the drive and the recess in the fastener head making it harder to slip when installed correctly



**DOUBLE HEAD** 

> greater tightness


### **PRACTICES**



WOOD AND FURNITURE CONSTRUCTIONS

FASTENERS | MARINE HARDWARE | FITTINGS | SOLAR

### **DIMENSIONS (MM)**

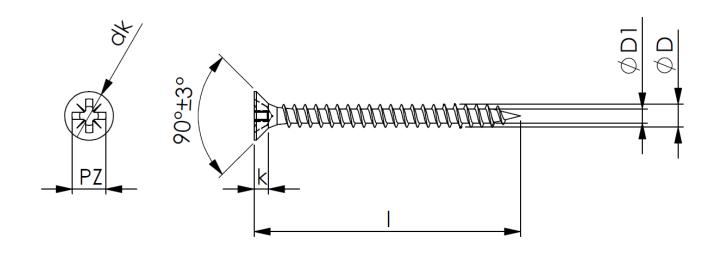

Diameter D	3	3,5	4	4,5	5	6
k	1,60 - 1,90	1,80 – 2,10	2,10 – 2,50	2,30 – 2,70	2,60 - 3,00	3,10 - 3,60
dk	5,60 - 6,00	6,60 - 7,00	7,50 - 8,00	8,50 - 9,00	9,50 – 10,00	11,50 – 12,00
D <sub>1</sub>	1,80 - 2,00	2,00 – 2,20	2,30 – 2,50	2,50 – 2,70	2,80 - 3,10	3,50 - 3,80
Ø 12111123	2	2	2	2	3	3
PZ	Z1	Z2	Z2	Z2	Z2	Z3

FASTENERS | MARINE HARDWARE | FITTINGS | SOLAR

# **DIMENSIONS (MM)**

Length I / Ø	3	3,5	4	4,5	5	6
12	Х	X	Х			
13	Х	Х	Х			
16	X	X	X	X	X	
20	Х	X	X	X	X	X
25	Х	X	X	X	X	X
30	Х	X	X	X	X	X
35	Х	X	X	X	X	X
40	Х	X	X	X	X	X
45	Х	X	X	X	X	X
50	Х	X	X	X	X	X
60			X	X	X	X
70			X	X	X	X
80			X	X	X	X
90					X	X
100					X	X
110					X	X
120					X	X
130					X	X
140					X	X

X = available ex stock

Further dimensions are available on request