

INOXMARE®

HEXAGON BOLTS WITH FLANGE + UHS (FULLY THREADED)



DATASHEET
SIM. DIN 6921-SV

FASTENERS | MARINE HARDWARE | FITTINGS | SOLAR

Via Pomposa, 51/i
47924 - Rimini (RN) - ITALY

Tel. +390541.794444 Fax +390541.794490
info@inoxmare.it - www.inoxmare.com

SIM. DIN 6921-SV

TECHNICAL SPECIFICATIONS

These hexagon head bolts with flange and under-head serration are similar to DIN 6921,

but in contrast offer the option of dispensing with additional screw locking.

Material	Stainless steel
Quality	A2 / A4
Surface	Blank
Special feature	Underhead serration

YOUR ADVANTAGES




FULLTHREAD
› flexible Use



UNDERHEAD SERRATION

FASTENERS | MARINE HARDWARE | FITTINGS | SOLAR

DIMENSIONS (MM)

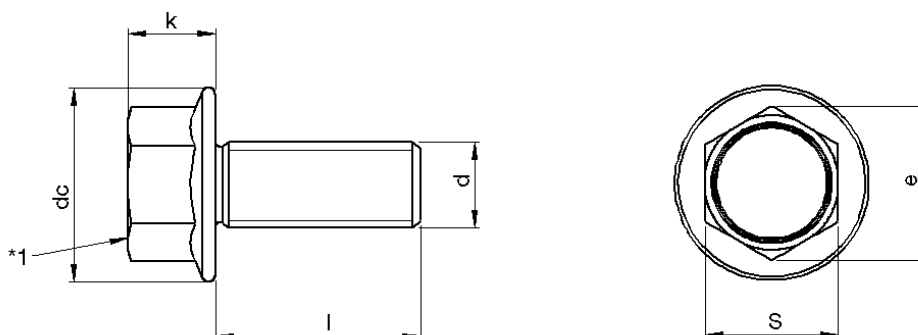

*1 recess permitted due to production

thread d		M4	M5	M6	M8	M10
k	max.	4,3	5,4	6,6	8,1	9,2
s	max.	7	8	10	13	15
dc	max.	10,6	11,8	14,2	18	22,3
e	min.	7,66	8,71	10,95	14,26	16,5

length l			M4	M5	M6	M8	M10
nom. dim.	min.	max.					
10	9,71	10,29	•	•	•		
12	11,65	12,35				•	
16	15,65	16,35		•			
20	19,58	20,42		•	•		•
25	24,58	25,42		•	•		•
30	29,58	30,42			•	•	•
35	34,5	35,5			•	•	•
40	39,5	40,5			•	•	
50	49,5	50,5				•	

FASTENERS | MARINE HARDWARE | FITTINGS | SOLAR