

INOXMARE®

ROOF HOOK – 3-WAY ADJUSTABLE



DATASHEET
ART. 9525

YOUR NEEDS
OUR MISSION

ART. 9525

TECHNICAL SPECIFICATIONS

Material	Stainless Steel
Quality	A2 / 1.4301 / AISI 304
Model	Punched, bent and sandblasted
Weight (Kg/pc)	0,776
Snow load (compressive load) max.	120 kg
Wind load (tensile load) max.	100 kg

YOUR ADVANTAGES



3-WAY ADJUSTABLE

› By means of long hole drillings



READY-FOR-USE

› Components are pre-assembled


PRACTICES



TILED ROOFS FROM A ROOF PITCH OF 20°

WE'D BE PLEASED TO ADVISE WITH YOUR APPLICATION.

DIMENSIONS (MM)

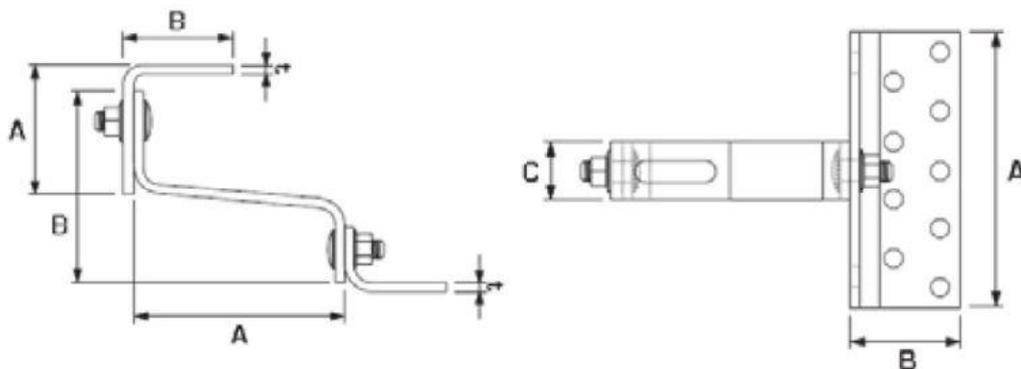

Component / Dimension	A	B	C	t	Hole- ϕ
Disc	138	56	-	5	9 mm
Hook	115	103	30	5	11 mm
Angle bracket	73	59	30	5	10,5 x 30 mm / 10,5 x 37,5 mm

WE'D BE PLEASED TO ADVISE WITH YOUR APLICATION.