

INOXMARE®

TX SOCKET BUTTON HEAD SCREWS WITH FLANGE, FT



DATASHEET
ITEM 9474 SIMILAR ISO 7380-2

FASTENERS | MARINE HARDWARE | FITTINGS | SOLAR

Via Pomposa, 51/i
47924 - Rimini (RN) - ITALY

Tel. +390541.794444 Fax +390541.794490
info@inoxmare.it -www.inoxmare.com

ITEM 9474 SIMILAR ISO 7380-2 TECHNICAL SPECIFICATIONS

The dimensions of our item 9474 are similar ISO 7380-2. Here the better TX drive was chosen instead

of the hexagon socket. Our item 9474 is only available with full thread and without head marking.

Material	Stainless steel
Quality	A2 / A4
Property class	070
Surface	blank
Mechanical properties	ISO 3506-1
Measurement letters and notations	ISO 225
Thread tolerance class	6g
Thread according to	ISO 965-1
General requirements	ISO 8992
Drive	TX acc. to EN ISO 10664
Specialities	Dimensions similar ISO 7380-2 only full thread
Headmarking	without

YOUR ADVANTAGES

FLANGE / COLLAR HEAD



- › larger contact surface
- › time saving, washer already integrated



WITHOUT HEAD MARKING

- › Better optics – decorative head


HEXALOBULAR / TX-DRIVE = FASTER SCREWING



- › Improved torque transmission
- › Optimal centering
- › Low risk of slipping of the tool
- › Minimises drive and bit wear

FASTENERS | MARINE HARDWARE | FITTINGS | SOLAR

DIMENSIONS (MM)

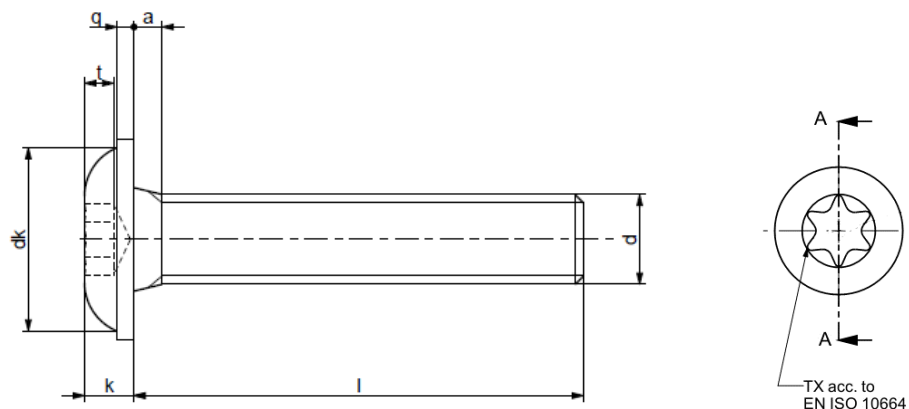

thread d		M3	M4	M5	M6	M8	
dk	min.	5,40	7,24	9,04	9,97	13,47	
	max.	5,70	7,60	9,60	10,60	14,10	
k	min.	1,40	1,95	2,50	3,00	4,10	
	max.	1,65	2,20	2,75	3,30	4,40	
q	min.	0,50	0,60	0,70	0,80	0,90	
	max.	0,70	0,80	0,90	1,00	1,10	
t	min.	1,04	1,30	1,56	2,08	3,20	
TX	nom.	10	20	25	30	40	
length l			M3	M4	M5	M6	M8
nominal	min.	max.					
5	4,76	5,24					
6	5,76	6,24					
8	7,71	8,29					
10	9,71	10,29					
12	11,65	12,35					
16	15,54	16,35					
20	19,58	20,42					
25	24,58	25,42					
30	29,58	30,42					
35	34,50	35,50					
40	39,50	40,50					

FASTENERS | MARINE HARDWARE | FITTINGS | SOLAR